


Launcher 10.7.2.15

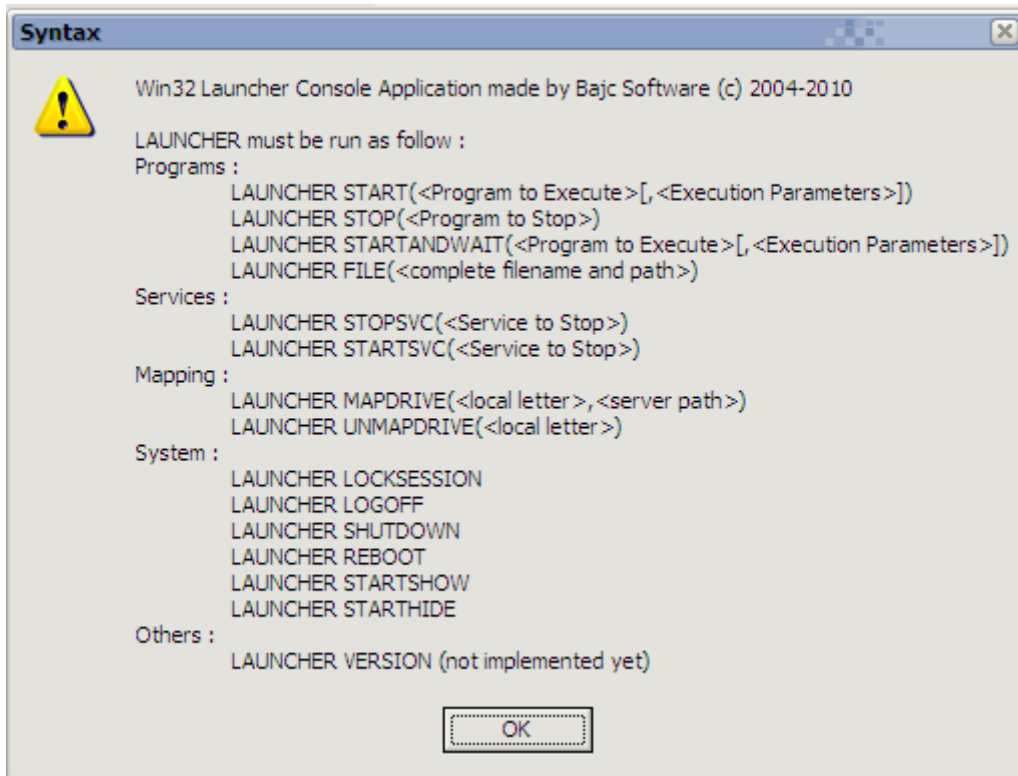

Usage :

```
Launcher "STOP(<Program to Stop>)"
"START(<Program to Execute>[,<Execution Parameters>])"
"STARTANDWAIT(<Program to Execute>[,<Execution Parameters>])"
"STOPSVCS(<Service to Stop>)"
"STARTSVCS(<Service to Start>)"
"REBOOT"
"SHUTDOWN"
"LOCKSESSION"
"LOGOFF"
"MAPDRIVE(<local letter>, <server path>)"
"UNMAPDRIVE(<local letter>)"
"FILE(<complete filename with path>)"
"STARTSHOW"
"STARTHIDE"
```

Exemple :

```
START(C:\mysql\bin\mysqld.exe,--install)
START(C:\mysql\bin\mysqld.exe,--remove)
MAPDRIVE(Z:; \\192.168.0.250\sharedfolder)
UNMAPDRIVE(Z)
FILE(c:\tempo\liste.txt)
```

Exemple of action list file for FILE argument :

```
[actions]
1=STARTANDWAIT(notepad.exe)
2=START(c:\windows\system32\charmap.exe)
```